


Drain Adaptor

with 3 Automatic-Run-Out-Valves 3/4" and 2 fixing spears

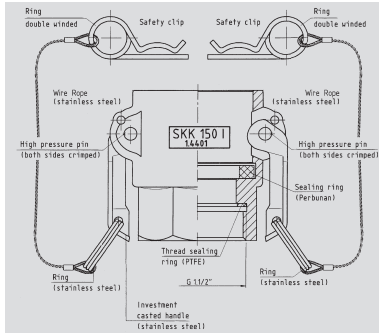

- High-quality drain adaptor made of stainless steel 1.4401
- Drains the lines automatically when installation is switched off and pressure drops to avoid frost damages on plant and hose lines
- Simply assemble the adaptor at the lowest point between snow pump and hydrant and fix it with two spears (60 cm long) in suitable position

Materials:

- Body: Stainless Steel 1.4401
- Valve: Brass MS 58 nickel-plated
- Seals: Buna N

Snow Master
by LUDECKE



Max. Working Pressure	Temperature	Media	
PN 60 bar	-40°C – +95°C	liquid media	1

Drain-Adaptor with 3 Automatic-Run-Out-Valves 3/4" and 2 fixing spears

Connection	Type-Size	L	ID	ID1	DN	Weight	Art.Nr.
MT / VT	150	197	53.4	54	40	2870	SKK 150 EA
MT / VT	200	216	63	63.8	50	4039	SKK 200 EA
Automatic-Run-Out-Valves also available separately (7 bore)						160	EWV 34
Automatic-Run-Out-Valves also available separately (1 bore)						170	EWV 341
Opening pressure of valves approx. 1 bar!							

High-Pressure Screwings

made of Zinc-plated Steel

- Thread Stems for long-term steady installations of pipe and hose lines, extremely robust execution
- Female thread stems with swivelling nut, flat sealing with thread sealing ring
- Appropriate safety clamps and crimping ferrules (☺ page 326)

Materials:

- Hose stem: Steel zinc-plated and blue passivated
- Seals: PUR

Max. Working Pressure	Temperature	Thread	Media	
PN 60 bar	-40°C – +95°C	ISO 228 / DIN 2999	liquid media	1

Male thread screwings for flat hoses or thick-walled rubber hoses

Thread connection	Hose connection	SW	DN	Weight	Type No.
R 1 m	Hose i.D. 25-28	36	20	220	SGA 100-T
R 1 1/2 m	Hose i.D. 38-40	50	40	372	SGA 150-T
R 2 m	Hose i.D. 38-40	60	40	210	SGA 200/150-T
R 2 m	Hose i.D. 50-54	60	50	620	SGA 200-T

Female thread screwings for flat hoses or thick-walled rubber hoses (with screwing nut)

Thread connection	Hose connection	SW	DN	Weight	Type No.
G 1 f	Hose i.D. 25-28	41	20	250	SGI 100-T
G 1 1/2 f	Hose i.D. 38-40	55	40	390	SGI 150-T
G 2 f	Hose i.D. 50-54	70	50	640	SGI 200-T

Attention: For hose connection each 9 different stem profiles types and sizes are available as standard version! For each order the exact hose type and size and preferred assembly method has to be notified to be able to choose the right hose stem version! For new stem profiles: minimum quantity is 50 sets

Other sizes on request!