

Swivel Transmissions

made of Brass for Water Applications

- High quality swivel transmission made of brass MS 58 nickel-plated or high resistant special brass (KTW compliant) – for drinking water applications
- High resistant swivel joint, offering optimized flow rates
- For pneumatic and fluid applications with rotating movement and heavy restrained connectors through vibrations, twisting and sideway movements

Materials

- Swivel transmission: Brass MS 58 nickel-plated/special brass (KTW compliant)
- O-ring: EPDM

Max. Working Pressure	Temperature	Thread	Media	
PN 10 bar	+95°C	ISO 228	Water	1

Swivel transmission straight made of brass nickel-plated


Thread connection	L	SW	D	L1	L2	SW1	Passage	Version	Weight	Type No.
G 3/4 a - G 3/4 f	54	30	34	15.5	8	30	17	straight	180	DV 34 IA
G 1 a - G 1 f	60	41	45	15.5	14	41	25.5	straight	350	DV 10 IA

Swivel transmission 90° brass nickel-plated

Thread connection	L	SW	B	L1	L2	SW1	Passage	Version	Weight	Type No.
G 3/4 m - G 3/4 f	74	30	55	15.5	8	30	17	90°	420	DV 3490 IA

Swivel transmission straight of special brass (KTW compliant)

Thread connection	L	SW	D	L1	L2	SW1	Passage	Version	Weight	Type No.
G 3/4 m - G 3/4 f	54	30	34	15.5	8	30	17	straight	180	DV 34 IA-T
G 1 m - G 1 f	60	41	45	15.5	14	41	25.5	straight	350	DV 10 IA-T

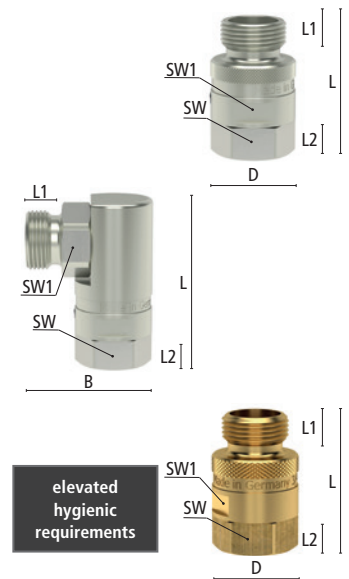

Hose Screw Type Fittings

made of Brass for Water Applications

- High quality hose screw type fittings made of brass MS 58
- Quick to release connection from hose to tools
- Robust, safe, leak proof and durable

Materials

- Hose screw type fitting: Brass MS 58 plain/ nickel-plated
- O-ring: EPDM

Max. Working Pressure	Temperature	Thread	Media	
PN 10 bar	+95°C	ISO 228	Water	10

Hose screw type fitting made of brass plain, female threads and union nut

Thread connection	Hose connection	L	B	L1	L2	Passage	Weight	Type No.
G 1/2 f	Hose i.D. 13	46	40	9	30	11	55	12/13 M
G 3/4 f	Hose i.D. 13	46.5	45	9.5	30	11	66	34/13 M
G 3/4 f	Hose i.D. 16	46.5	45	9.5	30	13	72	34/16 M
G 3/4 f	Hose i.D. 19	46.5	45	9.5	30	16	76	34/19 M
G 1 f	Hose i.D. 19	48	60	11	30	16	127	10/19 M
G 1 f	Hose i.D. 25	48	60	11	30	20.5	130	10/25 M

Hose screw type fitting made of brass nickel-plated, female threads and union nut

Thread connection	Hose connection	L	B	L1	L2	Passage	Weight	Type No.
G 1/2 f	Hose i.D. 13	46	40	9	30	11	55	12/13 MN
G 3/4 f	Hose i.D. 13	46.5	45	9.5	30	11	66	34/13 MN
G 3/4 f	Hose i.D. 16	46.5	45	9.5	30	13	72	34/16 MN
G 3/4 f	Hose i.D. 19	46.5	45	9.5	30	16	76	34/19 MN
G 1 f	Hose i.D. 19	48	60	11	30	16	127	10/19 MN
G 1 f	Hose i.D. 25	48	60	11	30	20.5	130	10/25 MN

