
32 BAR PAINTED VERTICAL AIR VESSELS



DIRECTIVE	2014/68/UE (PED)					
OPERATING PRESSURE	32 BAR					
OPERATING TEMPERATURE	-20 +50°C					

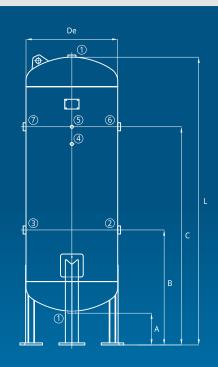

- MATERIAL: CARBON STEEL
- FLUID CONTENT: COMPRESSED AIR / NITROGEN / ARGON / HELIUM / OIL / OXYGEN (GROUP 1 - HYDROGEN EXCLUDED)
- FINISHING: EXTERNAL RAL 5015 BLUE PAINT (STANDARD)
- UPON REQUEST: INSPECTION PORTS 100X150 MM HANDHOLE - 300X400 MM MANHOLE - GALVANIZATION AND ALM PAINTING

CODE	Directive	Capacity	Operating pressure	De	Α	В	С	L	1	2	3	4	5	6	7	Weight
RAL 5015		Lt	Bar	mm	mm	mm	mm	mm	inch	Кд						
VEC02248	2014/68/UE (PED)	100	32	370	180	380	1055	1240	2"	3/4"	-	3/8"	3/8"	-	3/4"	88
VEC02249	2014/68/UE (PED)	270	32	500	175	600	1305	1673	2"	1"	1"	-	3/8"	1"	1"	192
VEC02250	2014/68/UE (PED)	500	32	600	155	785	1665	2063	2"	2"	2"	1/2"	1/2"	2"	2"	291
VEC02251	2014/68/UE (PED)	1000	32	800	145	770	1720	2375	2"	2"	2"	3/8"	3/8"	2"	2"	468
VEC02252	2014/68/UE (PED)	1500	32	1000	170	680	1780	2322	2"	2"	2"	1/2"	1/2"	2"	2"	663
VEC02253	2014/68/UE (PED)	2000	32	1100	200	880	1913	2576	2"	2"	2"	1/2"	1/2"	2"	2"	800
VEC02254	2014/68/UE (PED)	3000	32	1200	140	830	2250	2314	2"	2"	2"	1/2"	1/2"	2"	2"	1183
VEC02255	2014/68/UE (PED)	4000	32	1450	225	800	2145	2847	2"	3"	3"	3/4"	3/8"	3"	3"	1935
VEC02256	2014/68/UE (PED)	5000	32	1450	225	800	2745	3447	2"	3"	3″	3/4"	3/8"	3"	3"	2325