




Acid-Chemical Hoses

PREMIUM™ CHEM MASTER EPDM SD

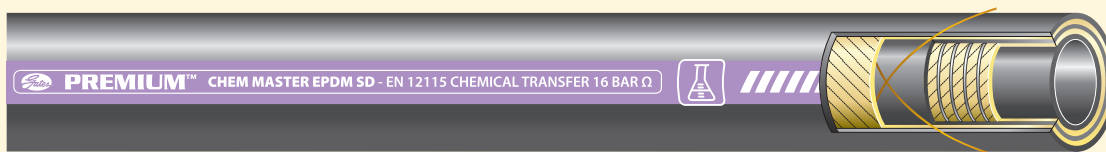

								
mm	mm	mm	Bar	Bar	mm	Kg/m	m	REF.
19	31	6	16	48	95	0.7	40	4696-11051
25	37	6	16	48	125	0.9	40	4696-11052
32	44	6	16	48	160	1.0	40	4696-11053
38	51	6.5	16	48	190	1.3	40	4696-11054
50	66	8	16	48	250	2.2	40	4696-11055
51	67	8	16	48	255	2.2	40	4696-11056
63	79	8	16	48	315	2.8	40	4696-11057
75	91	8	16	48	375	3.2	40	4696-11058
76	92	8	16	48	380	3.3	40	4696-11059
100	116	8	16	48	500	4.3	40	4696-11060
101.5	118	8	16	48	508	4.3	40	4696-11061
150	172	11	16	48	750	9.0	40	4696-11062

RECOMMENDED FOR

Premium suction and discharge hose (SD) for handling a variety of chemical products such as acids, alkalis, esters and ketones with a medium or low concentration. Tank truck, barge, ship, or storage tank transfer of a variety of mild chemical products.

TUBE

Black EPDM, smooth, conductive

REINFORCEMENT

Braided, high tensile synthetic textile cord, steel wire helix with crossing anti-static wires

COVER

EPDM black, ozone and chemicals resistance, conductive with cloth impression

TEMPERATURE

-40°C to +95°C

BURST PRESSURE

> 48 Bar

ELECTRICALLY CONDUCTIVE

$R < 10^6 \text{ Ohm}$

STANDARDS

EN 12115

BRANDING TRANSFER LABEL

PREMIUM™ CHEM MASTER EPDM SD - EN 12115 CHEMICAL TRANSFER 16 BAR Ω

BRANDING EMBOSSED LABEL

GATES PREMIUM™ CHEM MASTER EPDM SD - EN 12115 - EPDM - DIAM .. - 16 BAR - Ω - Q - year

