


42 BAR PAINTED VERTICAL AIR VESSELS

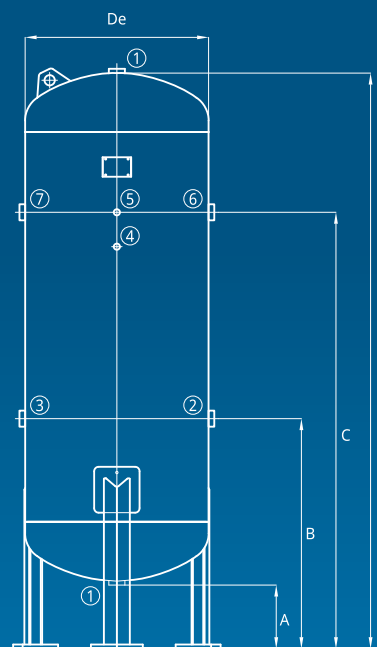

DIRECTIVE	2014/68/UE (PED)
OPERATING PRESSURE	42 BAR
OPERATING TEMPERATURE	-20 +50°C

- MATERIAL: CARBON STEEL
- FLUID CONTENT: COMPRESSED AIR / NITROGEN / ARGON / HELIUM / OIL / OXYGEN (GROUP 1 - HYDROGEN EXCLUDED)
- FINISHING: EXTERNAL RAL 5015 BLUE PAINT (STANDARD)
- UPON REQUEST: INSPECTION PORTS - 100X150 MM HANDHOLE - 300X400 MM MANHOLE - GALVANIZATION AND ALM PAINTING

CODE	Directive	Capacity	Operating pressure	De	A	B	C	L	1	2	3	4	5	6	7	Weight
RAL 5015		Lt	Bar	mm	mm	mm	mm	mm	inch	inch	inch	inch	inch	inch	inch	Kg
VEC02262	2014/68/UE (PED)	100	42	370	180	380	1055	1240	2"	3/4"	-	3/8"	3/8"	-	3/4"	95
VEC02263	2014/68/UE (PED)	200	42	446	200	450	1255	1620	2"	1"	-	1/2"	3/8"	-	1"	140
VEC02264	2014/68/UE (PED)	270	42	500	175	600	1305	1673	2"	1"	1"	-	3/8"	1"	1"	209
VEC02265	2014/68/UE (PED)	500	42	600	155	785	1665	2063	2"	2"	2"	1/2"	1/2"	2"	2"	350
VEC02266	2014/68/UE (PED)	1000	42	800	145	770	1720	2375	2"	2"	2"	3/8"	3/8"	2"	2"	673
VEC02267	2014/68/UE (PED)	1500	42	1000	170	680	1780	2322	2"	2"	2"	1/2"	1/2"	2"	2"	830
VEC02268	2014/68/UE (PED)	2000	42	1100	200	880	1913	2576	2"	2"	2"	1/2"	1/2"	2"	2"	800
VEC02269	2014/68/UE (PED)	3000	42	1200	140	830	2250	2914	2"	2"	2"	1/2"	1/2"	2"	2"	1935
VEC02270	2014/68/UE (PED)	4000	42	1450	225	800	2145	2847	2"	3"	3"	3/4"	3/8"	3"	3"	2540
VEC02271	2014/68/UE (PED)	5000	42	1450	225	800	2745	3447	2"	3"	3"	3/4"	3/8"	3"	3"	2845