


Hydraulická šroubení

přímá šroubení

3

Redukovaná šroubení s těsnícím kuzelem – těžká řada										
Obj. č.		Řada	Tlak PN (bar)		Trubka D2	Trubka D1	Závit d1	Délka L	SW S1	SW S2
ocel	nerez		ocel	nerez						
RK-68S	RKX-68S	S	800	630	6 mm	8 mm	M16 × 1,5	41,5	17	19
RK-610S	-	S	800	-	6 mm	10 mm	M18 × 1,5	42	17	22
RK-810S	RKX-810S	S	800	630	8 mm	10 mm	M18 × 1,5	42	19	22
RK-612S	RKX-612S	S	630	630	6 mm	12 mm	M20 × 1,5	43,5	17	24
RK-812S	RKX-812S	S	630	630	8 mm	12 mm	M20 × 1,5	43,5	19	24
RK-1012S	RKX-1012S	S	630	630	10 mm	12 mm	M20 × 1,5	45,5	22	24
RK-814S	-	S	630	-	8 mm	14 mm	M22 × 1,5	48	19	27
RK-1014S	RKX-1014S	S	630	630	10 mm	14 mm	M22 × 1,5	49	22	27
RK-1214S	-	S	630	-	12 mm	14 mm	M22 × 1,5	49	24	27
RK-616S	RKX-616S	S	630	400	6 mm	16 mm	M24 × 1,5	46,5	17	30
RK-816S	RKX-816S	S	630	400	8 mm	16 mm	M24 × 1,5	46,5	19	30
RK-1016S	RKX-1016S	S	630	400	10 mm	16 mm	M24 × 1,5	47,5	22	30
RK-1216S	RKX-1216S	S	630	400	12 mm	16 mm	M24 × 1,5	47,5	24	30
RK-1416S	RKX-1416S	S	630	400	14 mm	16 mm	M24 × 1,5	50,5	27	30
RK-620S	RKX-620S	S	400	400	6 mm	20 mm	M30 × 2	50,5	17	36
RK-820S	RKX-820S	S	400	400	8 mm	20 mm	M30 × 2	50,5	19	36
RK-1020S	-	S	400	-	10 mm	20 mm	M30 × 2	51,5	22	36
RK-1220S	RKX-1220S	S	400	400	12 mm	20 mm	M30 × 2	51,5	24	36
RK-1420S	RKX-1420S	S	400	400	14 mm	20 mm	M30 × 2	54,5	27	36
RK-1620S	RKX-1620S	S	400	400	16 mm	20 mm	M30 × 2	54,5	30	36
RK-625S	-	S	400	-	6 mm	25 mm	M36 × 2	53	17	46
RK-825S	-	S	400	-	8 mm	25 mm	M36 × 2	53	19	46
RK-1025S	RKX-1025S	S	400	400	10 mm	25 mm	M36 × 2	54	22	46
RK-1225S	RKX-1225S	S	400	400	12 mm	25 mm	M36 × 2	54	24	46
RK-1625S	RKX-1625S	S	400	400	16 mm	25 mm	M36 × 2	57	30	46
RK-2025S	RKX-2025S	S	400	400	20 mm	25 mm	M36 × 2	60,5	36	46
RK-830S	-	S	400	-	8 mm	30 mm	M42 × 2	58,5	19	50
RK-1030S	RKX-1030S	S	400	400	10 mm	30 mm	M42 × 2	59,5	22	50
RK-1230S	RKX-1230S	S	400	400	12 mm	30 mm	M42 × 2	59,5	24	50
RK-1630S	-	S	400	-	16 mm	30 mm	M42 × 2	62,5	30	50
RK-2030S	-	S	400	-	20 mm	30 mm	M42 × 2	66	36	50
RK-2530S	-	S	400	-	25 mm	30 mm	M42 × 2	69	46	50
RK-1238S	-	S	400	-	12 mm	38 mm	M52 × 2	63	24	60
RK-1638S	-	S	400	-	16 mm	38 mm	M52 × 2	66	30	60
RK-2038S	RKX-2038S	S	400	315	20 mm	38 mm	M52 × 2	69,5	36	60
RK-2538S	RKX-2538S	S	400	315	25 mm	38 mm	M52 × 2	72,5	46	60
RK-3038S	-	S	400	-	30 mm	38 mm	M52 × 2	75,5	50	60

Upozornění: pro objednání samostatného těla šroubení uveďte na začátek obj.č. písmeno X, např. XRK-68S

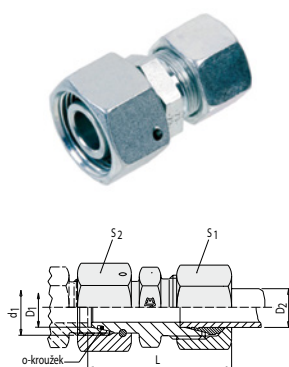

související zboží:

Hadice
str. 342



Rychlospojky
str. 407



Nástrčné spojky
str. 38



Manometry
str. 625

